

INVERTER GENERATOR 1020 W

- 1020 W generator with inverter technology for devices with sensitive electronics, power tools etc.
- 53.5 cc displacement, air-cooled 4-stroke petrol engine for reliable performance
- Fuel consumption at 2/3 load: 0.68 l/h with a run time of 5.9 h
- Features a 230 V alternating current socket and pull starter
- Comfortable operation: power saving mode, power indicator, overload display, oil protection display
- Compact and lightweight design with carrying handle for easy transport
- Sturdy rubber feet for secure positioning

OPTIONAL ACCESSORIES

ENGINE OIL
ULTRA
PERFORMANCE
LONGLIFE SAE
5W-40
500 ml



Article number: 3906100701
Barcode: 4014915073512

Transport handle (standard)



Rubber feet to protect against vibration



SPECIFICATIONS - ENGINE

Model	Single-cylinder; 4 stroke petrol engine
Max. engine power	2,04 HP
Displacement	53.5 cc
Starter	Pull starter
Tank capacity	4 L

LOGISTICAL DATA

Weight net / gross	12.7 / 14.3 kg
Packaging dimensions	420 x 320 x 398 mm
Article number	5906223903
Barcode	4046664095989
20 Container	455 pcs
40 Container	980 pcs
40 HQ Container	1174 pcs

SPECIFICATIONS - GENERATOR

Dimensions L x W x H	410 x 310 x 383 mm
Voltage control	Inverter
Rated output / max. output	1000 / 1020 W
Socket	230 V~
AC frequency	50 Hz
Overload protection	Yes
Low oil warning	Yes



SELF-SUFFICIENT ENERGY SUPPLY

SUITABLE FOR


Camping




Garden shed



Heating system



Refrigerator



Event



Construction site



Laptop



Mobile phone



Fuel tank capacity: 4 L



1020 W max. power

User-friendly operation

Easy start using pull starter

Robust machine housing

53.5 cc, 2 HP, 4-stroke petrol engine

PRODUCT DETAILS

Lasting



1 x 230 V power outlet



Oil warning indicator



Energy saving switch



Overload protection



Fuel-saving



Lightweight



Robust




Space-saving



Transportable



Voltage control system inverter: Clean sine curve, suitable for sensitive electrical devices.

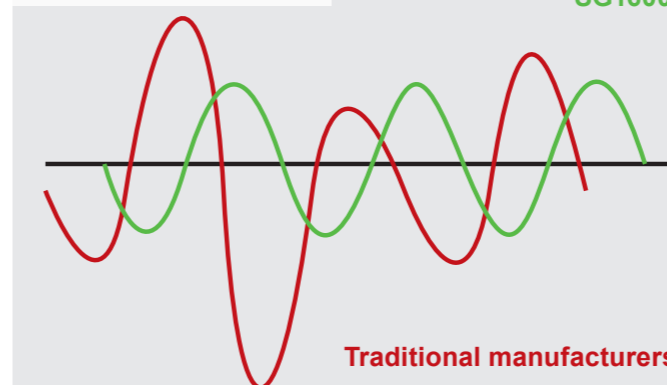

Traditional manufacturers